


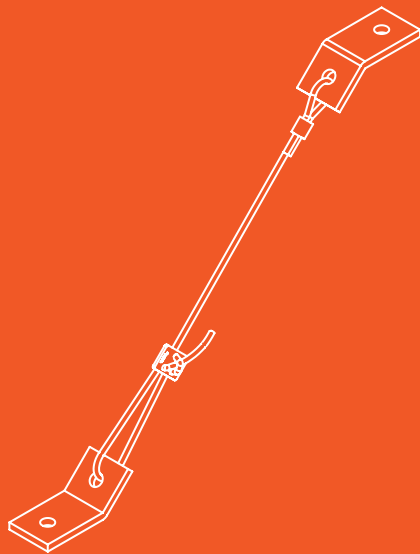

Technical Product Specifications:

SEISMIC CABLE BRACING

Approval/calculation possibilities:

- AS/NZS 4600:2018
- NZS 4100:2020
- NZS1170.5:2009
- NZS 4219:2009
- NZS 4541:2020
- AS/NZS 4680:2006




SEISMIC CABLE BRACING

Designed for a Wide Range of Uses

Cable or wire bracing and suspension offers an alternative to solid bracing and supports - so you can select the solution that best meets the unique needs of your project.

- Seismic Bracing
- Suspension
- Catenary Wire

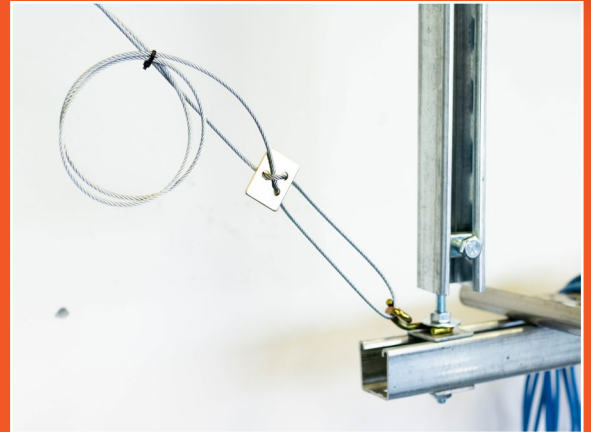

Fast, Easy & Cost Effective

Cable systems can be very cost-effective. They are smaller and lighter, so they are easy to install and transport, saving you precious install time and keeping your project moving and making.



Features and Benefit

- Alternative to solid bracing.
- Easy to transport and install.
- Complies with New Zealand Building Standard NZS 4219:2009 – Seismic performance of engineering systems in buildings.




Contents

V.LOCK Seismic Cable Brace
with 45° Angle BracketsPage 4

V.LOCK Seismic Cable Brace
with Retrofit Hook BracketsPage 5


■ V.LOCK Seismic Cable Brace with 45° Angle Brackets

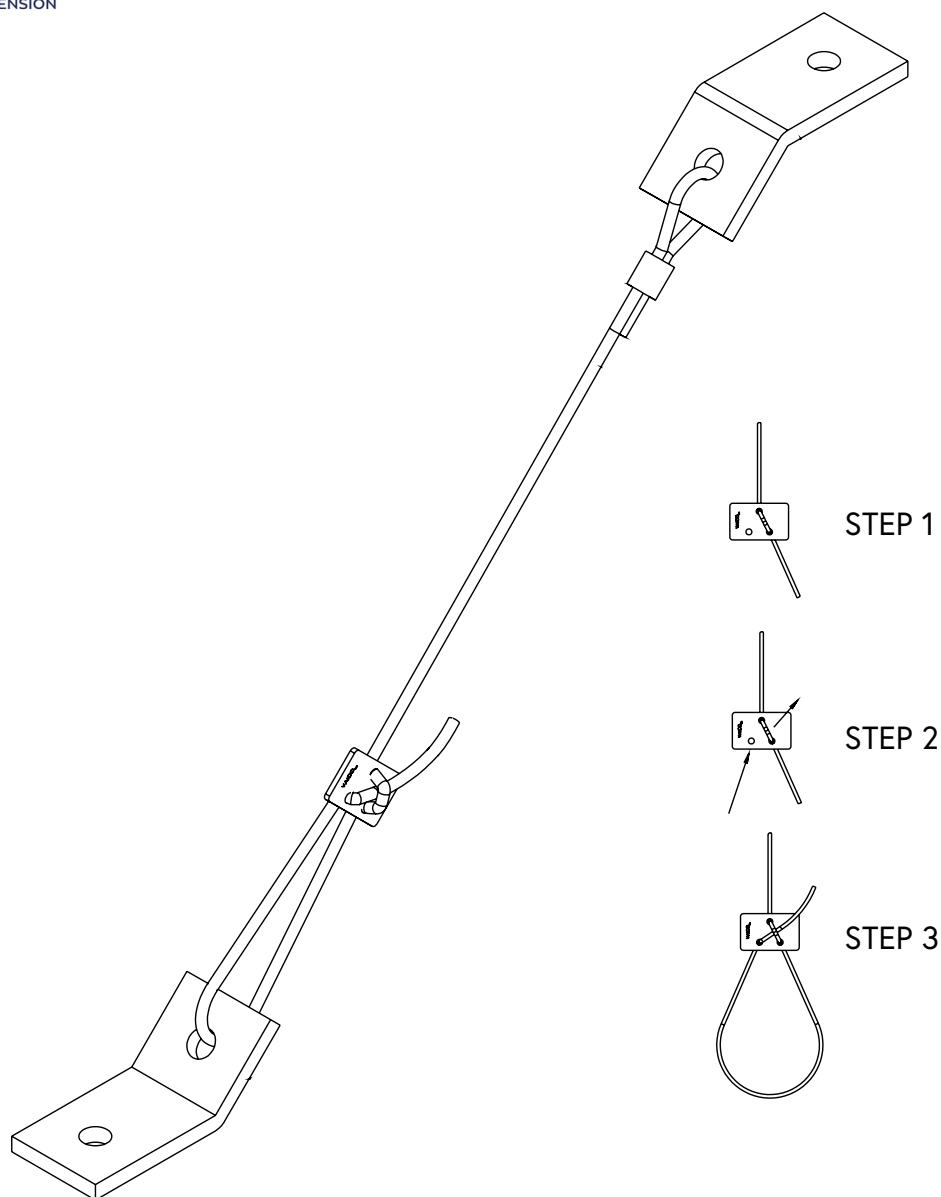

Note: The No.6 size may initially be supplied with Wire Rope Grips in place of swage and V.LOCK plate

V.LOCK Seismic Cable Brace with 45° Angle Brackets	
Cable Size	ULS (Ultimate Limit State)
No. 3 - (3.18mm / 1/8")	485 kg
No. 5 - (4.75mm / 3/16")	1064 kg
No. 6 - (6.35mm / 1/4")	1489 kg

V.LOCK Seismic Cable Brace with Retrofit Hook Brackets

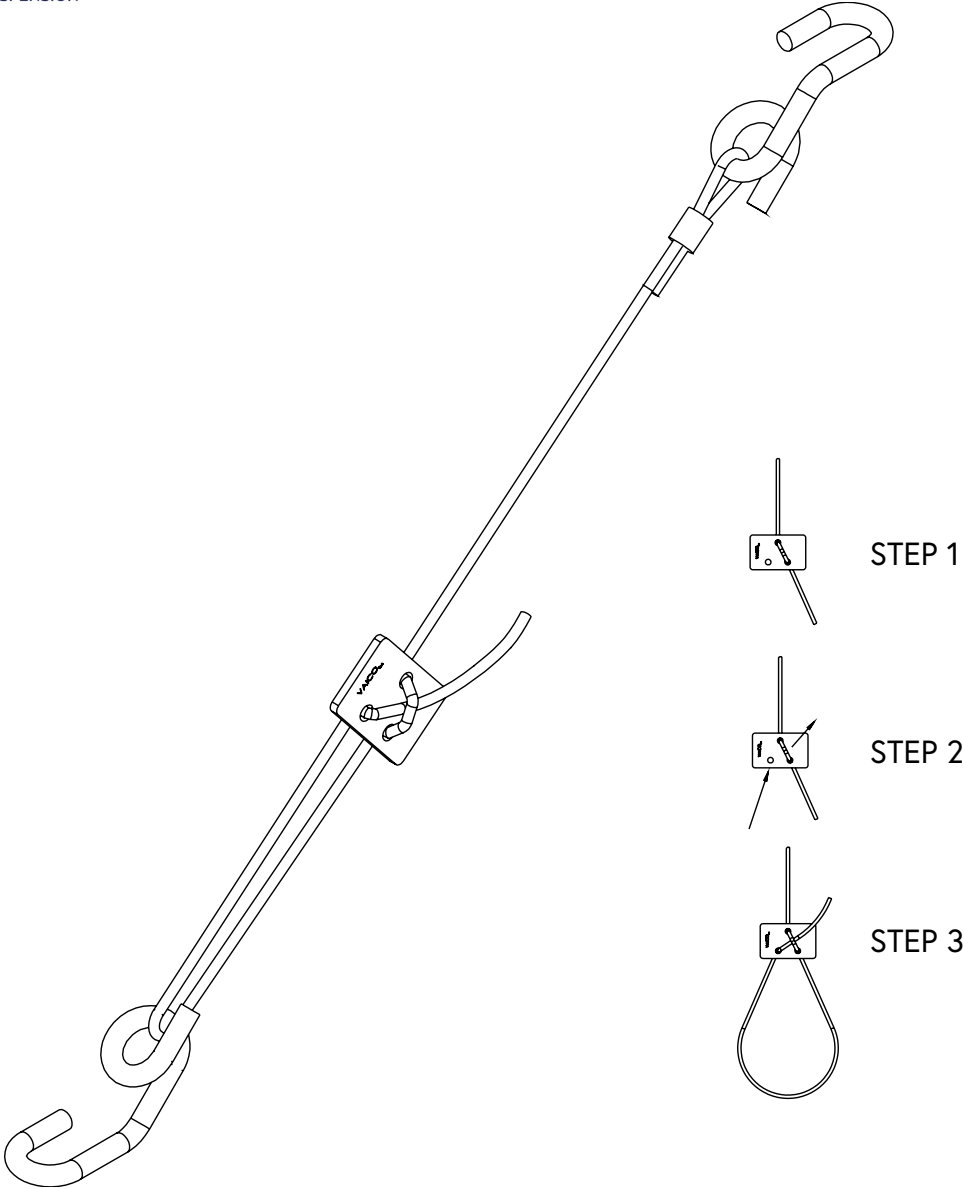

V.LOCK Seismic Cable Brace with Retrofit Hook Brackets	
Cable Size	ULS (Ultimate Limit State)
No. 3 - (3.18mm / 1/8")	485 kg
No. 5 - (4.75mm / 3/16")	635 kg



sales@fdgnz.com

20 Mansel Dr, Warkworth, Auckland 0910 New Zealand

09-275-6811

This document is issued by Fasteners Direct Global Limited ("FDG") for general technical guidance only, and is intended for suitably qualified engineers and construction professionals. Performance data is derived from technical information published by the product manufacturer.

The information applies only to the product configuration, installation conditions and standards current at the date of issue, and within the range and configurations stated. It is not a substitute for independent engineering judgement and must not be the sole basis for design, certification or construction decisions. Determining the product's suitability for a specific application, and compliance with all applicable codes and project requirements, remains the responsibility of the project engineer.

Nothing in this document constitutes a warranty or guarantee of performance in service. FDG may revise or withdraw it at any time and accepts no liability, to the maximum extent permitted by law, for any loss arising from reliance on it or on a superseded revision.