

THERMALOC HOT & COLD PIPE SUPPORTS

Light weight and extremely tough Thermobreak® Thermalock is a high density, closed cell, cross linked polyethylene polymer foam pipe support for hot and cold applications.

EASY AND SAFE TO INSTALL


Thermaloc installation is as simple as placing the two pieces over the pipe, squeezing together gently and applying foil tape (supplied separately). No cutting means no fibres, no dust, no mess to clean up afterwards and no need for protective face masks and gloves. Thermaloc is Green Star compliant (Low VOC), has Zero Global Warming Potential (GWP) and is manufactured without ozone destroying agents such as CFCs or HCFCs.




BUILD TO PERFORM, BUILT TO LAST

Thermaloc's closed cell technology is unaffected by water and humidity as well as being resistant to detergents, diluted acids, alkalis, alcohols, esters and fungi, ensuring performance in even the most demanding applications and over the life of the installation.

Once sealed, Thermaloc's profile ensures an airtight finish preventing potential air condensation especially in cold line applications. Thermaloc's high-density foam also absorbs pipe contraction and expansion movements preventing gap formation and erosion of the ferrule over time.

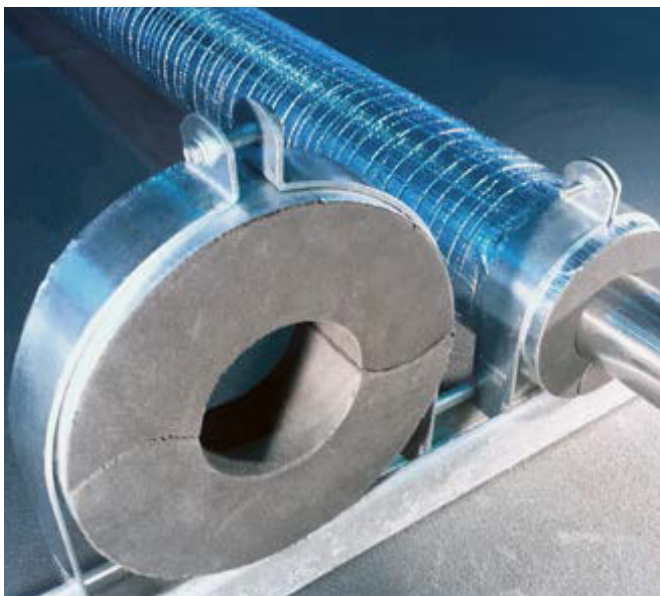

HOT & COLD PIPE SUPPORTS



Physical Properties

Material:	Crosslinked Closed Cell Polyolefin Foam
Density:	300kg/m ³
Moisture absorption by volume: (internal)	<1% w/w
Resistance to fungi:	Good
Ozone Resistance:	Excellent
UV Resistance:	Excellent
Operating Temperature Range:	-40 °C to 105 °C
Thermal Conductivity: (ASTM C518)	0.069 W/mk
VOC Emission Rate: (ASTM D5116)	Low VOC Emitting ("Green Star")
Compression Strength: (internal)	850 kPa @ 10% deflection 970 kPa @ 25% deflection 1540 kPa @ 50% deflection

Size Availability

Nominal ID A (mm) Sizes: 6.35 to 450 Materials: Available in Copper, IPS & PPR
BS 6853 Annex B (mm) 13 40 15 50 25 55 30 63 *Other wall thickness available upon request
On Pipe Length C (mm) 50 75 (available on request)
*Flat based Thermaloc available for pipe sizes DN 100 / NPS 4 & above

Fire & Smoke Performance

BS 6853 Annex B (Smoke Toxicity)	Complies (R<1.0)
BS 6853 Annex B (Foil Tape Faced)	Complies (AS 4254)





PLAN, BUILD, CREATE
BETTER

fdgnz.com / sales@fdgnz.com / 0800 555 464